

Vaho Glass
SV-X50



VAHO GLASS



SV-X50

Technical Details

MINIMUM SPACE, MAXIMUM COMFORT

SV-X50 is a frameless sliding glass shower door system that combines the latest technological developments with an attractive minimalist design.

1. **Compact** aluminum sliding **track** that conceals all the mechanisms; thus, achieving an unbeatable aesthetic appearance.
2. Available in **different finishes**: brushed nickel aluminum, polished chrome aluminum, satin brass aluminum and matt black anodized aluminum.
3. **Installation** wall-wall, wall-glass, glass-glass and angular (90°)
4. Suitable for **glass thicknesses** of 8 and 10mm (only 8mm for angular)
5. **Quick and easy installation** thanks to the frontal access to all components and its adjustments and regulations.
6. **Ball bearing rollers** for a smooth and silent sliding action.
7. **Double SofTop damping system**: thanks to the latest developed damping technology, the opening effort is minimal as it has been reduced by almost 40%. Likewise, a smooth and silent closing in the last 7cm of the sliding path is achieved. The double SofTop damping system protects the system from impact damage, thus extending the useful life of the product and with only a minimum door width of 630mm required.
8. **Applus+ Certificate**: Durability grade 6: 100.000 test cycles and Corrosion grade 4 = 240h according to EN1527 standards.
9. **Optional accessories**: horizontal water seals and sealing gaskets that can be easily removed for cleaning and/or changing.






Mounting wall-to-wall



SV-X50

Technical characteristics


Profiles




Specifications

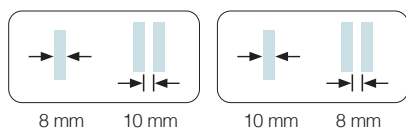

MÍN.450 mm



Softop Doble
MÍN.630 mm



MÍN.450 mm
MÁX.750 mm



Softop Doble
MÍN.630 mm
MÁX.750 mm



KIT AVAILABLE



BALL BEARING

Weight

50 kg

110 lb

90° OPTION

30 kg



66 lb

Certificated product




Durability grade 6:
100.000 test cycles
and Corrosion grade 4
= 240h.

Technology and ease of installation

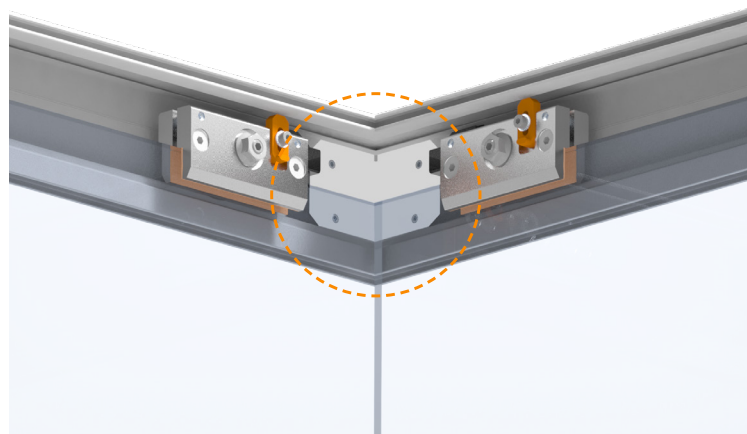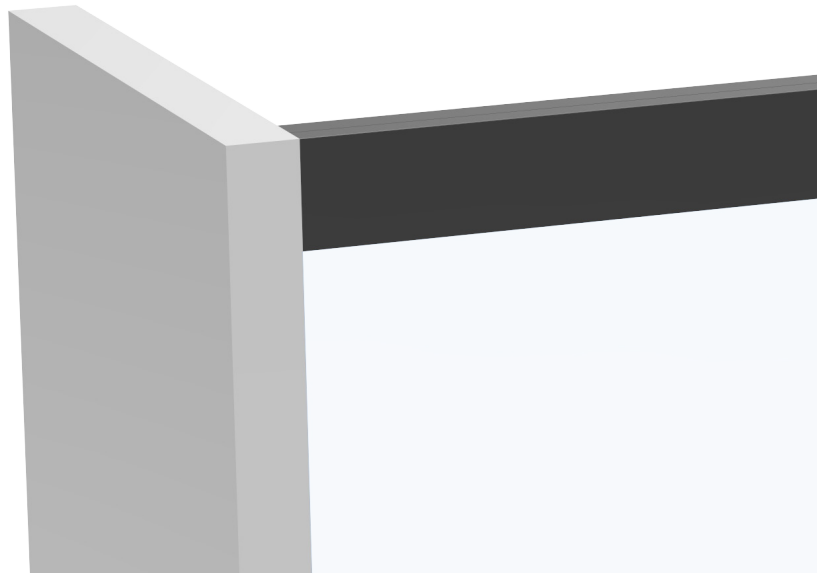


Angular connector for easy installation as it does not require any drilling. Designed to avoid any possible bending of the angle thanks to its high load capacity. The profiles are supplied cut at 45°.

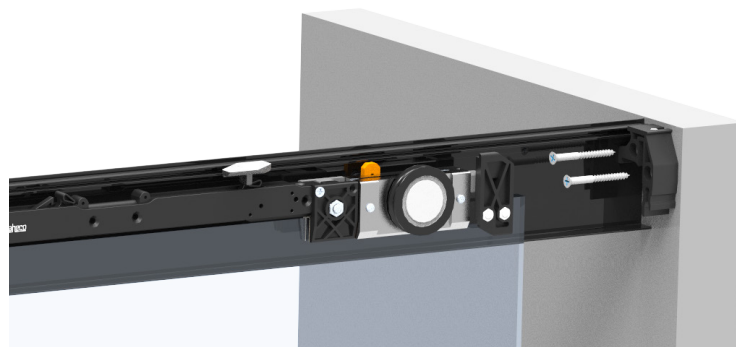


Hidden floating wall and glass mounting brackets.



DOUBLE SOFTTOP: thanks to the **latest developed damping technology**, the **opening effort** is minimal as **it has been reduced by almost 40%**. Likewise, a smooth and silent closing in the last 7cm of the sliding path is achieved. The double SofTop damping system protects the system from impact damage, thus extending the useful life of the product and with only a minimum door width of 630mm required.

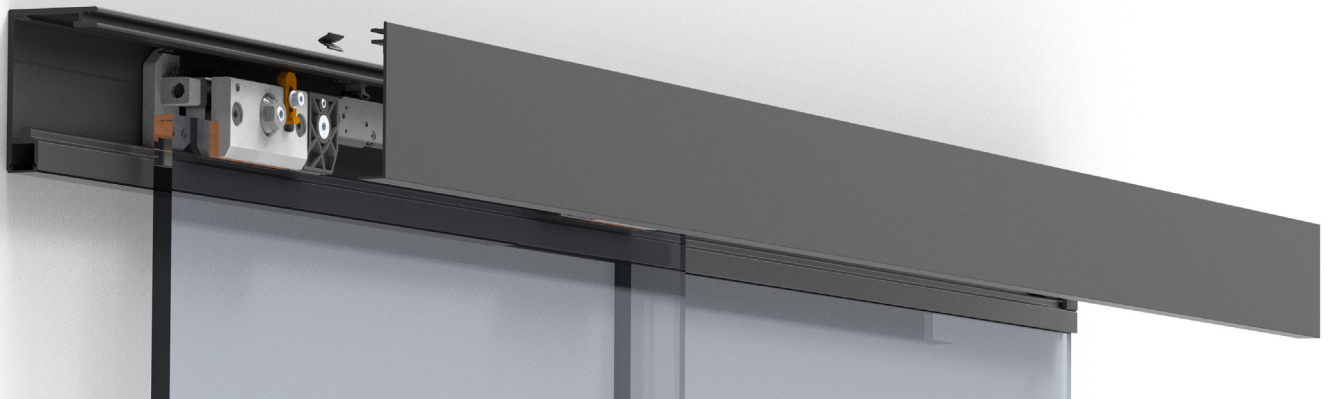


Frontal access to all components and its adjustments and regulations. The lateral top cover track is clipped to save installation time.

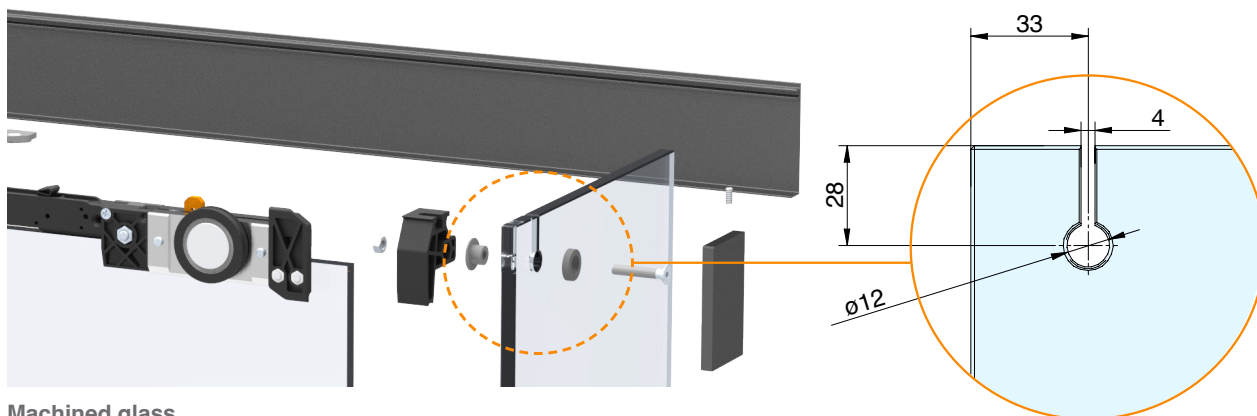


Machined glass


Compact and sleek design

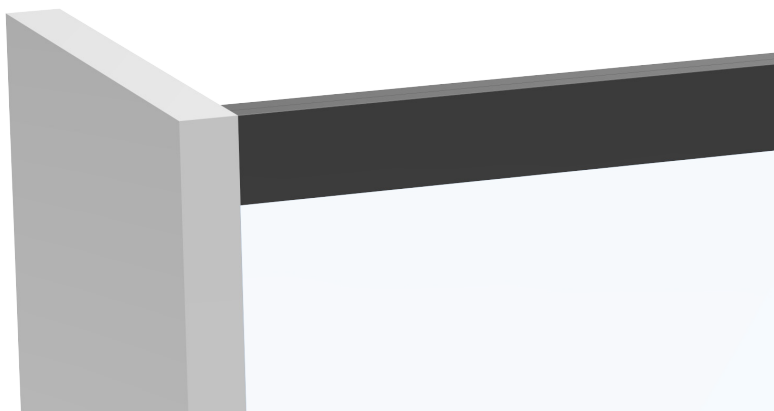


Smooth and compact track (76x49mm) in different finishes available that offers excellent possibilities for integration into any type of architectural design.

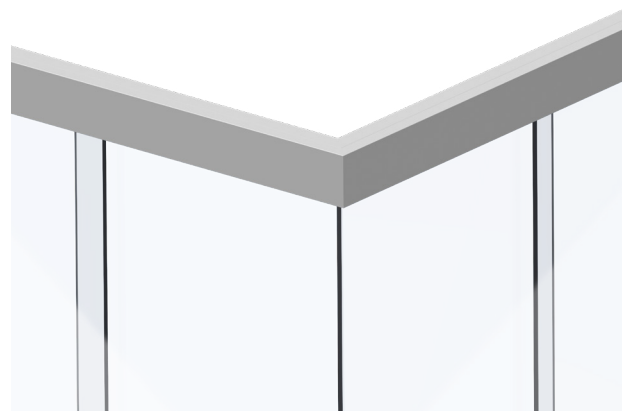

Internal angular connector for joining the two tracks at 90°, leaving the visible surface of the track with a clean and linear finish.

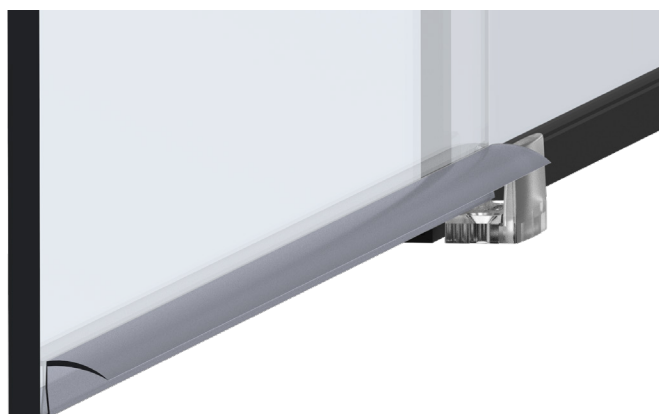

Transparent plastic bottom guide (resistant to UV rays) for optimal visual aesthetics. **Water seals, edge water seals and sealing gaskets available**, easy-to-remove for cleaning and/or changing.

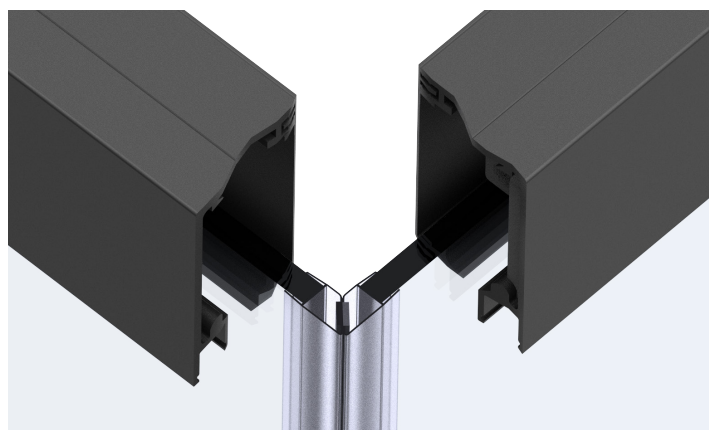

Available finishes



Brushed nickel aluminium
Shiny



Polished chrome aluminium
Shiny



Satin brass aluminium
Shiny



Matt black anodized aluminium



Mounting glass-to-wall



Project by Servicons Reformas & Interiorismo

Mounting wall-to-wall




Mounting glass-to-wall




Cross-section

(Dimensions in mm)

KIT 2 SV-X50 90° ANGLE I SECTION MINIMUM PANEL WIDTH, SOFTOP OPTION

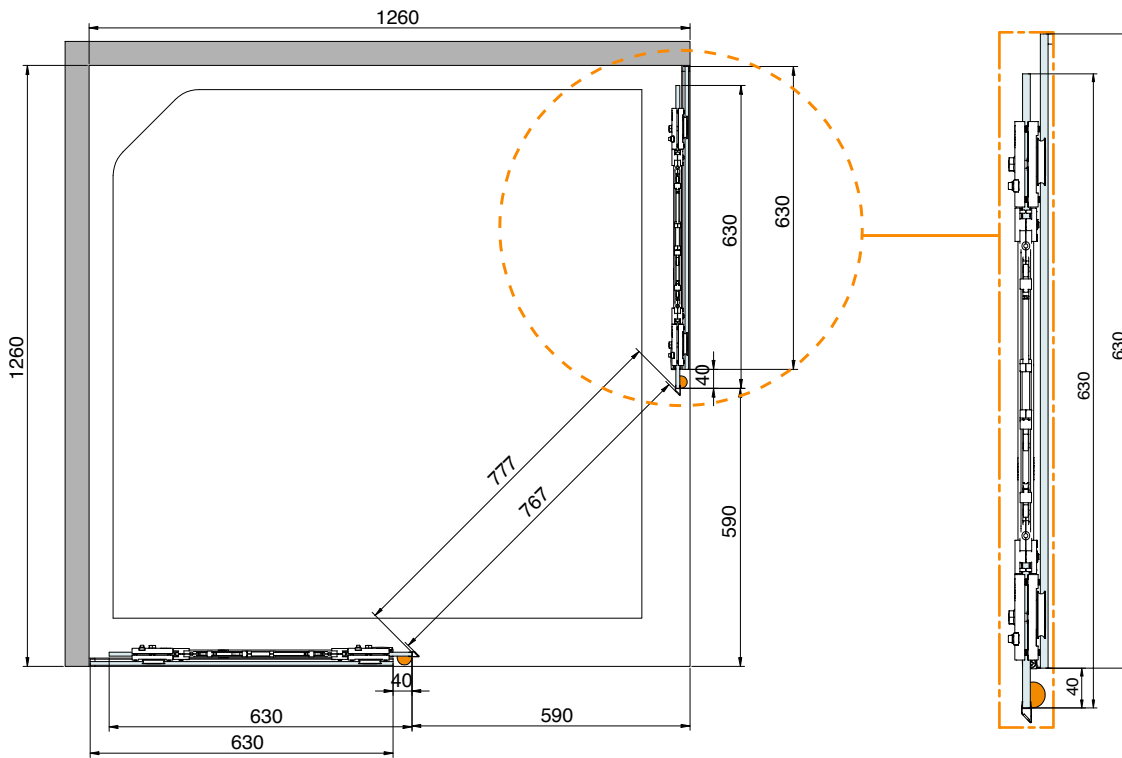


KIT 2 SV-X50 90° ANGLE I SECTION MINIMUM PANEL WIDTH, OPTION WITHOUT SOFTOP

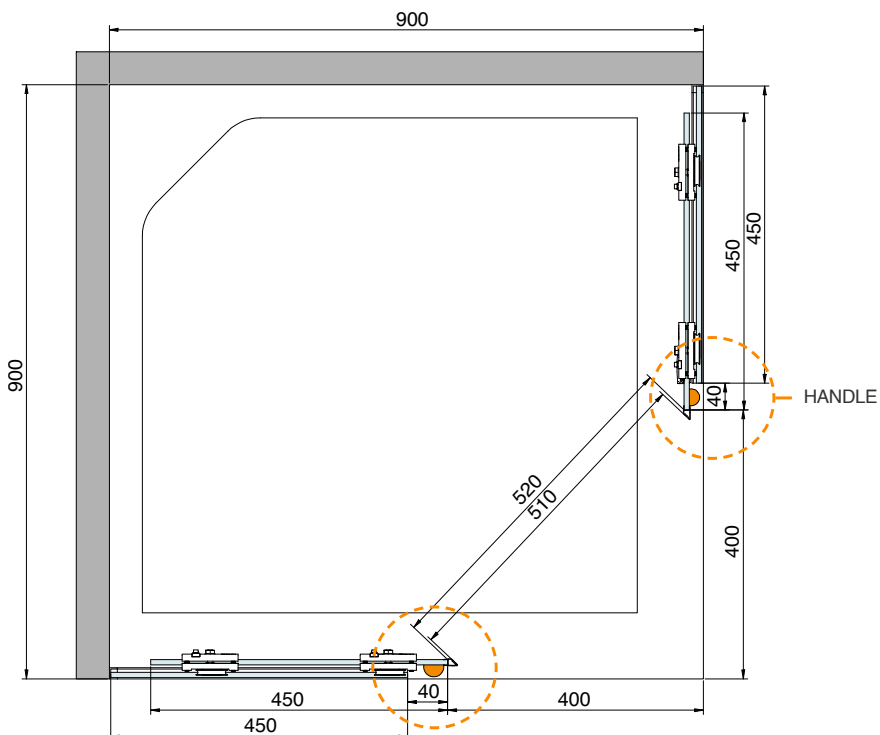

Components

KITS

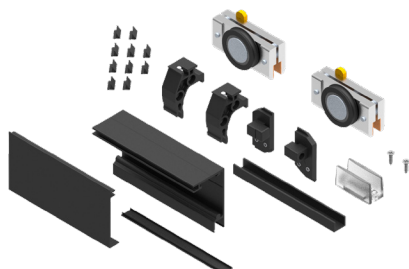


SV-X50 - KIT 1
x2 Retaining stopper

50kg



BALL BEARING

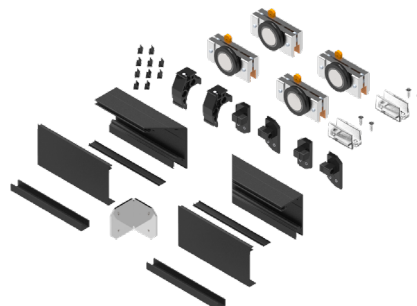


SV-X50 kit angular 90° - KIT 2
x2 Retaining stopper

30kg



BALL BEARING




ACCESSORIES




SV-X50 Double SofTop

50kg

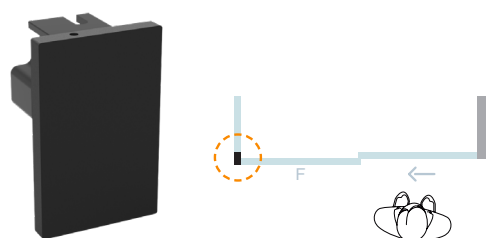

SV-X50
Fixed glass mounting bracket 90°. Left

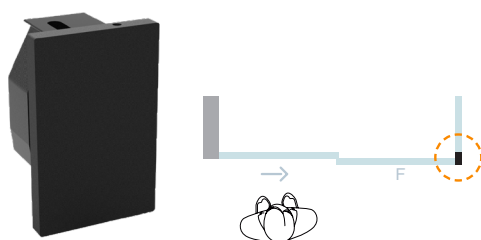

SV-X50
Fixed glass mounting bracket 90°. Right



SV-X50
Plastic bottom guide for glass of 8-12mm

Available Finishes

● **BN I** Brushed nickel aluminium
Shiny

● **PC I** Polished chrome aluminium
Shiny

● **SB I** Satin brass aluminium
Shiny

● **BA I** Matt black anodized aluminium

Notes

Vaho Glass

SV-X50



Polígono Industrial de Foradada / 08580
St. Quirze de Besora / Barcelona / Spain
T +34 93 852 96 15
export@saheco.com
saheco.com



Saheco's Exclusive Distributor
Melbourne Office
170 Derrimut Drive Derrimut Vic 3030

Tel. 1300 4 ELITE
sales@eliteglasssolutions.com.au
eliteglasssolutions.com.au

Adelaide Office
7 Manfull St. Melrose Park SA 5039